Machine Name : CNC lathe

Brand : GOODWAY

Machine Model : GLS-2000Le

Stock No. : 61031

Ex-factory Date : 2020



Main Technical Parameters:

X-axis travel: 230mm

Z-axis travel: 630mm

Spindle bearing diameter: 100mm

Spindle speed: 4200rpm

Spindle through hole diameter: 66mm

Maximum bar diameter: 51mm

Maximum torque: 88N.m

Chuck size: 6inches

Rotating diameter over bed: 650mm

Maximum machining diameter: 420mm

Maximum machining length: 600mm

Fast feed rate: 30m/min

Tool magazine: 10

Tool internal diameter: 40mm

Tool external diameter: 25mm

Spindle power: 11/7.5kw

Machine dimension: 2800*1520*1680mm

Machine weight: 3500kg

PamtonSchnell














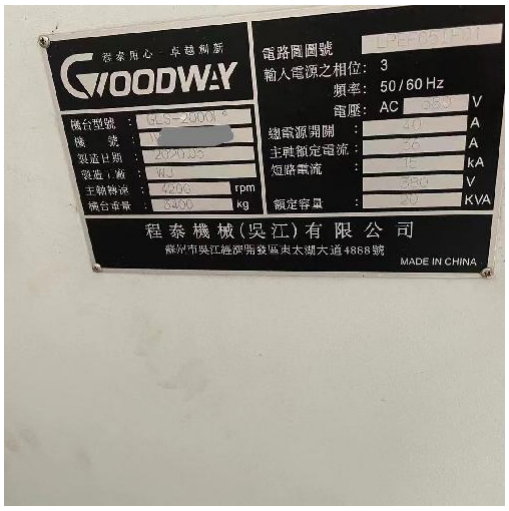

程泰机械（吴江）有限公司

加工能力	棒料最大直径	mm	Φ51
	最大拉苯	N.m	88
	卡盘尺寸	寸	8
	床身回转直径	mm	Φ560
	最大加工直径	mm	Φ420
	最大加工长度	mm	600
移动	X/Z轴快速移动	m/min	30/30
	导轨形式	-	线轨
刀塔	刀具数	把	10
	刀具分度时间（单位）	sec	0.2秒
	刀具内径	mm	Φ40
	刀具外径	mm	□25
电机	主轴功率（30分/连续）	KW	11/7.5
	主轴驱动系统		交流伺服
	X/Z轴功率	KW	1.2
	进给系统驱动系统		交流伺服
精度（VDI3441）	定位精度（X/Z）	mm	0.008
	重复定位精度（X/Z）	mm	0.004
颜色			墨白基配
	切削重量	L	160

3	X/Z軸馬達	日本/FANUC	伺服馬達內置編碼器（任意點設定原點）
4	刀塔馬達	日本/FANUC	伺服馬達內置編碼器（任意點設定原點）
5	滑軌與滑座	臺灣/HIWIN	C3等級
6	滾珠導螺杆	臺灣/ PMI	C3等級
7	主軸軸承	日本/NSK	P4等級
8	三爪夾頭	臺灣/佳寶	
9	主軸皮帶	美國/GATES	
10	刀塔曲齒離合器	日本 / SUDA	精密定位
11	自動潤滑器	臺灣/振榮	
12	切削液泵	臺灣/华乐士	
13	油壓閥及控制閥	日本/不二越	
14	變壓器	臺金	

注：以上是机床主要配件指定点供应商，因技术升级、改进，个别零件更换厂商时，我方制作零件不低于原零件的质量等级标准。