**Machine Name : Turn-milling combination**

**Brand : Mazak**

**Machine Model : Integrex 200-IIIST**

**Stock No. : 470782**

**Ex-factory Date : 2006**



**Main Technical Parameters:**

CNC System: Mazak 640 MT Pro

Swing over the slide guideway: 660 mm

Maximum machining diameter :  660mm

Maximum working diameter :  64mm

X-axis travel :  580mm

X2 axis travel :  150mm

Z-axis travel :  1.045 MMMM

Z2 axis travel :  1.010 mm

Y axis travel :+/-80mm

W axis travel :  1.050 mm

B axis travel :  - 30 ° / + 195 °

Spindle speed range :  35-4000rpm

Milling spindle :  HSK-A63


Milling spindle speed :  15-12000rpm

Tool magazine : 40


PamtonSchnell





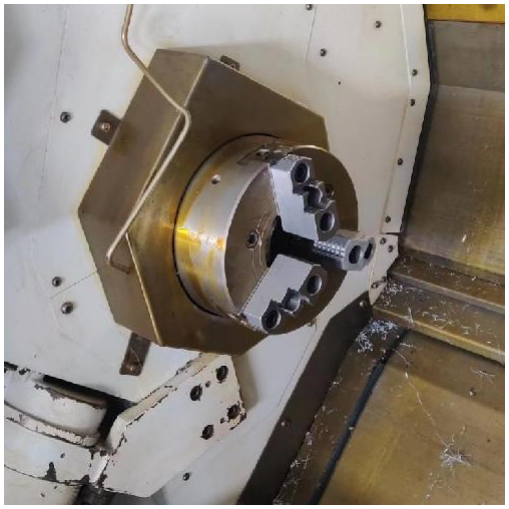




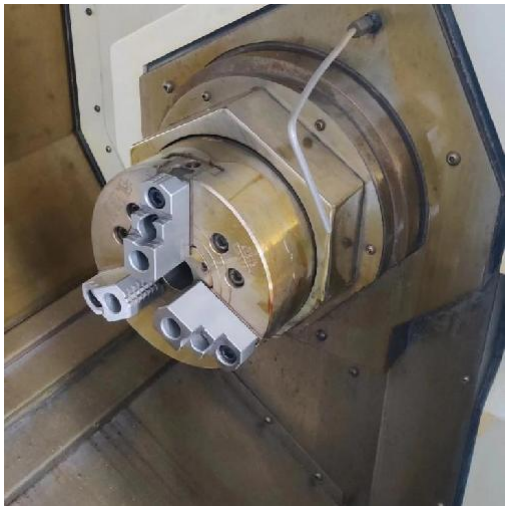



PamtonSchnell



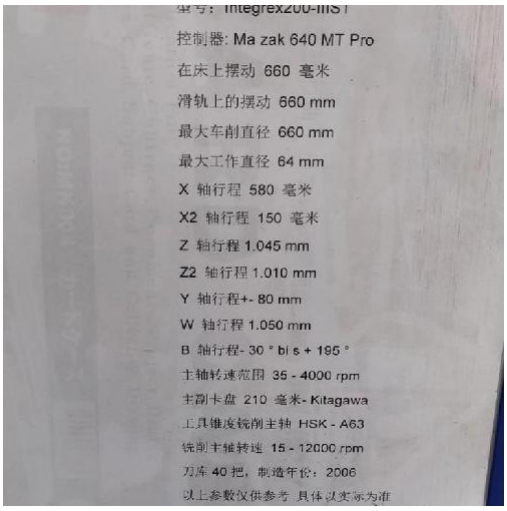

型号：Integrex200-IIIS T
控制器: Ma zak 640 MT Pro
在床上摆动 660 毫米
滑轨上的摆动 660 mm
最大车削直径 660 mm
最大工作直径 64 mm
X 轴行程 580 毫米
X2 轴行程 150 毫米
Z 轴行程 1.045 mm
Z2 轴行程 1.010 mm
Y 轴行程+- 80 mm
W 轴行程 1.050 mm
B 轴行程- 30 ° bi s + 195 °
主轴转速范围 35 - 4000 rpm
主割卡盘 210 毫米- Kitagawa
工具锥度铣削主轴 HSK - A63
铣削主轴转速 15 - 12000 rpm
刀库 40 把，制造年份：2006
以上参数仅供参考 具体以实际为准

