Machine Name : CNC incline

Brand : Neway

Machine Model : NL403

Stock No. : 84295

Ex-factory Date :



Main Technical Parameters:

Maximum rotating diameter: φ660/φ480mm

Maximum machining diameter: φ500mm

Maximum machining length: 770mm

Spindle through hole diameter: φ86mm

X*Z axis travel: 280*800mm

X*Z axis fast moving rate: 24*30m/min

Spindle power: 15/18.5kw

Spindle speed: 30-3500rpm

Chuck size: 10 inches


Maximum boring tool diameter: φ40mm

Dimensions: 4490*1880*1750mm

Weight: 4100kg

PamtonSchnell



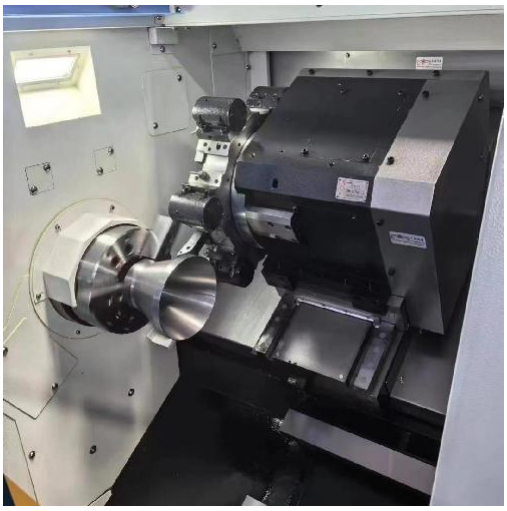



加工范围	最大加工直径	mm	⌀500	
	最大加工长度	mm	770	
	主轴通孔直径	mm	⌀86	
电机扭矩	X 轴伺服电机扭矩	Nm	11	
	Z 轴伺服电机扭矩	Nm	11	
行程	X 轴行程	mm	280	
	Z 轴行程	mm	800	
主轴	输出功率	kW	15/18.5	FANUC
	主轴端部形式		A2-8	
	主轴转速	rpm	30~3500	
	卡盘	inch	10"	中实
尾架	尾架套筒直径/行程	mm	⌀100/100	
	锥孔锥度		莫氏 5#	活顶尖
速度	快速移动速度（X 轴）	m/min	24	
	快速移动速度（Z 轴）	m/min	30	
	切削进给速度	mm/min	1~8000	
刀架	刀具容量	把	12	
	刀具分度时间	秒/位	0.2	
	车刀刀体尺寸	mm	25×25	
	最大镗刀直径	mm	⌀40	
机床精度	定位精度（X 轴）	mm	0.008	
	定位精度（Z 轴）	mm	0.008	
	重复定位精度（X 轴）	mm	0.004	
	重复定位精度（Z 轴）	mm	0.004	