

Machine Name : 5 axes machining center

Brand : MAZAK

Machine Model : INTEGREX i-200S

Stock No. : 86787

Ex-factory Date : 2021



Main Technical Parameters:

Maximum machining diameter: $\Phi 670$ mm

Maximum machining length: 1011mm



8 inch chuck


spindle maximum speed: 5000Rpm

milling spindle Maximum speed: 12000 Rpm

three-axis travel :535*210*900mm

3 axes fast feed: 48000*40000 *40000 mm/min

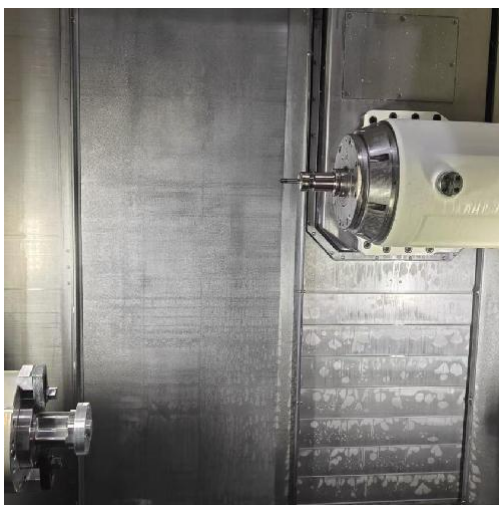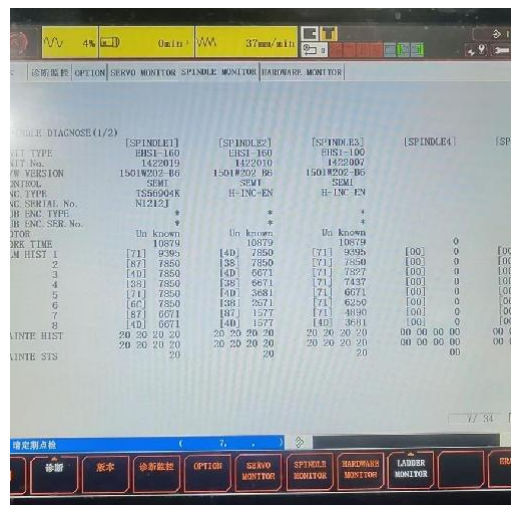

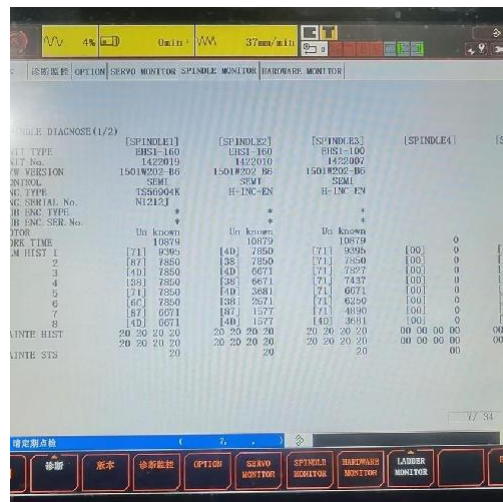



I-200H ST 850U Ø600mm/Ø400mm 535mm/210mm/900mm/30° → +210° 210mm/900mm 38, 74, 112 5000min ⁻¹ , 22 kW(30 HP) 5000min ⁻¹ , 18.5 kW(25 HP) 12000min ⁻¹ , 12 kW(16 HP)	I-250H 1080U/1500U Ø670mm/— 695mm/300mm/1077mm/1585mm/30° → +210° 38, 74, 112 5000min ⁻¹ , 22 kW(30 HP) 12000min ⁻¹ , 24 kW(32 HP)	I-250H S 1080U/1500U Ø670mm/— 695mm/300mm/1077mm/1585mm/30° → +210° 38, 74, 112 5000min ⁻¹ , 22 kW(30 HP) 12000min ⁻¹ , 24 kW(32 HP)
I-350H 1080U/1500U/2500U Ø670mm/— 695mm/300mm/1077mm/1585mm/2566mm/30° → +210° 38, 74, 112 4000min ⁻¹ , 30 kW(40 HP) 4000min ⁻¹ , 28 kW(35 HP) 12000min ⁻¹ , 24 kW(32 HP)	I-350H S 1500U/2500U Ø670mm/— 695mm/300mm/1585mm/2566mm/30° → +210° 38, 74, 112 4000min ⁻¹ , 30 kW(40 HP) 4000min ⁻¹ , 28 kW(35 HP) 12000min ⁻¹ , 24 kW(32 HP)	I-350H ST 1500U Ø670mm/Ø420mm 695mm/300mm/1585mm/30° → +210° 220mm/158mm 38, 74, 112 4000min ⁻¹ , 30 kW(40 HP) 4000min ⁻¹ , 28 kW(35 HP) 12000min ⁻¹ , 24 kW(32 HP)
I-450H S 1500U/2500U Ø670mm/— 695mm/300mm/1585mm/2566mm/30° → +210° 38, 74, 112 3300min ⁻¹ , 37 kW(50 HP) 4000min ⁻¹ , 26 kW(35 HP) 12000min ⁻¹ , 24 kW(32 HP)	I-450H ST 1500U Ø670mm/Ø420mm 695mm/300mm/1585mm/30° → +210° 220mm/158mm 38, 74, 112 3300min ⁻¹ , 37 kW(50 HP) 4000min ⁻¹ , 26 kW(35 HP) 12000min ⁻¹ , 24 kW(32 HP)	

II
 0U e-500H-S
 0U/4000U e-500H
 0U/4000U e-670H-S

