

Machine Name : Vertical machining center

Brand : KITAMURA

Machine Model : Mycenter- 3XH

Stock No. : 88563

Ex-factory Date : 2016



Main Technical Parameters:

travel of X*Y*Z axis: 760*455*460mm

Worktable size: 410*900mm

Maximum load: 500kg

Spindle speed: 40- 15,000 RPM

spindle taper: NST.NO.40

spindle motor power: 15kw

spindle torque: 95.5Nm

Rapid feed rate: 50,000 mm/min


Chip feed rate: 0-36000mm/min

tools magazine :30

Distance from worktable to spindle nose is 110*570mm

machine tool weight: 5,740 kg

Appearance Footage: 2235*2370*2882.4mm

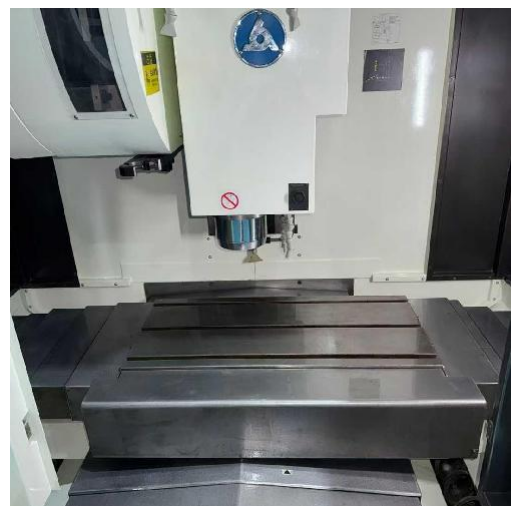



“大摩食心”每日加工粗加工后的原料时间。粗加工和精加工中，当机头完成，无故障时，必须立即清洗并
空加工。

西人著作：2733册

转速范围: 20-20000rpm。

北村机械 Mycenter3XIG/3XG		
工作台	工作区尺寸	410×900 mm
	最大承重量	900kg
	X/Y/Z轴行程	180/425/486mm
工轴	行程速度	258 ± 30 / s
	最大承重量	40 ± 0.005 mm/s
	工轴一速	1.8kW
	行程精度	0.01 mm
	运行方向	垂直主轴
刀架	刀架数量	8轴(6轴+2)
	刀柄	MA62-DT20-46
	刀具安装(3-7-T-C-C)	1.8sec/3.3sec
快速进给	快速进给速度(无负载)	50,000 mm/min
	快速进给速度(有负载)	45,000 mm/min
	机床排屑/排油	50,000 mm/min
电源和气/液要求	电压/功率	50/3,000-5,000/20KVA
机床尺寸	机床尺寸(W×D×H)	2,210×2,270×2,820 ± 4mm
	机床重量	3.8-4.0kg
	行程精度	±0.001mm/300mm(2-轴/3-轴/5-轴)