

Machine Name : Vertical machining center

Brand : KITAMURA

Machine Model : Mycenter- 3XH

Stock No. : 4488563

Ex-factory Date : 2016



Main Technical Parameters:

travel of X*Y*Z axis: 760*455*460mm

Worktable size: 410*900mm

Maximum load: 500kg

Spindle speed: 40- 15,000 RPM

spindle taper: NST.NO.40

spindle motor power: 15kw

spindle torque: 95.5Nm

Rapid feed rate: 50,000 mm/min


Chip feed rate: 0-36000mm/min

tools magazine :30

Distance from worktable to spindle nose is 110*570mm

machine tool weight: 5,740 kg

Appearance Footage: 2235*2370*2882.4mm

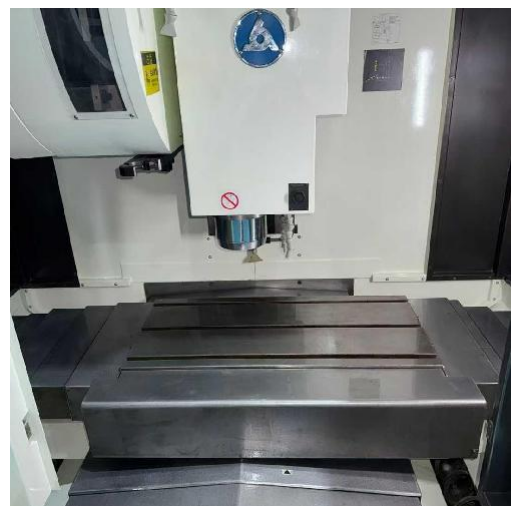



“大摩食心”每日加工粗加工后的原料时间。粗加工和精加工中，当机头完成，无故障时，必须立即清洗并
空加工。

西人著作：2733册

转速范围: 20-20000rpm。

北村机械 Mycenter3XIG/3XG		
工作台	工作区尺寸	410×900 mm
	最大承重量	900kg
	XYZ行程	180/425/486mm
工轴	行程范围	28 ± 0.01 mm
	最大承重量	40 ± 0.05 mm
	工轴一速	1.8kW
	行程范围	65 mm
	运行方向	垂直升降
刀架	刀架数量	8位(6位)
	刀柄	M45 D10T20.45
	刀头安装(3-7-T-C-C)	1.8sec/3.5sec
快速进给	快速进给速度(无负载)	50,000 mm/min
	快速进给速度(有负载)	35,000 mm/min
	机床材料: 铸铁	50,000 mm/min
电源和气路要求	电压/功率	50/3,000W=300V, 20KVA
机床尺寸	机床尺寸(W×D×H)	2,210×925×3,282±5mm
	机床重量	3,540kg
控制系统	控制系统	AlphaLink II (三菱 5A-7500V)