

Machine Name : Vertical machining center

Brand : KITAMURA

Machine Model : Mycenter- 3XH

Stock No. : 444488563

Ex-factory Date : 2016



Main Technical Parameters:

travel of X*Y*Z axis: 760*455*460mm

Worktable size: 410*900mm

Maximum load: 500kg

Spindle speed: 40- 15,000 RPM

spindle taper: NST.NO.40

spindle motor power: 15kw

spindle torque: 95.5Nm

Rapid feed rate: 50,000 mm/min


Chip feed rate: 0-36000mm/min

tools magazine :30

Distance from worktable to spindle nose is 110*570mm

machine tool weight: 5,740 kg

Appearance Footage: 2235*2370*2882.4mm

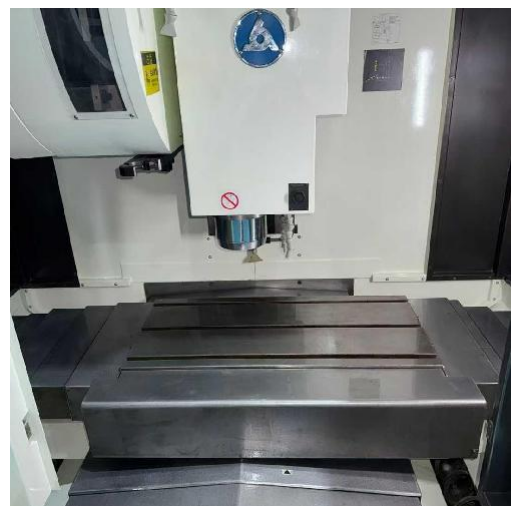



「大摩金」每日加「粗加」下并的所需时间。粗加下和性加下并+ 当例+ 完成。记录误差，从而观测误差并
空十上。

输入动作：2780 回

转速范围: 20-20000rpm,

北机机械 Mycenter 3XiG/3XG		
工作台	工作尺寸/寸	4150×800 mm
	最大承重	900kg
	X/Z轴行程	X/Z=450×460mm
主轴	主轴转速	205~260 r/min
	最大承重	40~15,000 mm/s
	加工长度	1.85m
刀库	主轴电机	63.5kW
	主轴形式	直联主轴
	刀库容量	30把(90°)
刀座	刀柄	MA65 BT30×46
	刀具安装口 (T-T-C-C-C)	1.5mm×3.3mm
	刀库用连接板(X/Z行程)	50,300 mm/min
快速进给	快速进给速度(X/Z)	95,300 mm/min
	快速进给速度(Y)	95,300 mm/min
	快速进给速度	95,300 mm/min
电源和气压要求	电压/气压	5/200-600V±10%、0.6MPa
机床尺寸	机床尺寸(W×D×H)	2,150×920×2,350±4mm
控制系统	机床系统	3.5-40kg
	软件系统	Autocad 2D/3D (三菱 M7500)