

Machine Name : Vertical machining center

Brand : KITAMURA

Machine Model : Mycenter- 3XH

Stock No. : 44444488563

Ex-factory Date : 2016



Main Technical Parameters:

travel of X*Y*Z axis: 760*455*460mm

Worktable size: 410*900mm

Maximum load: 500kg

Spindle speed: 40- 15,000 RPM

spindle taper: NST.NO.40

spindle motor power: 15kw

spindle torque: 95.5Nm

Rapid feed rate: 50,000 mm/min


Chip feed rate: 0-36000mm/min

tools magazine :30

Distance from worktable to spindle nose is 110*570mm

machine tool weight: 5,740 kg

Appearance Footage: 2235*2370*2882.4mm

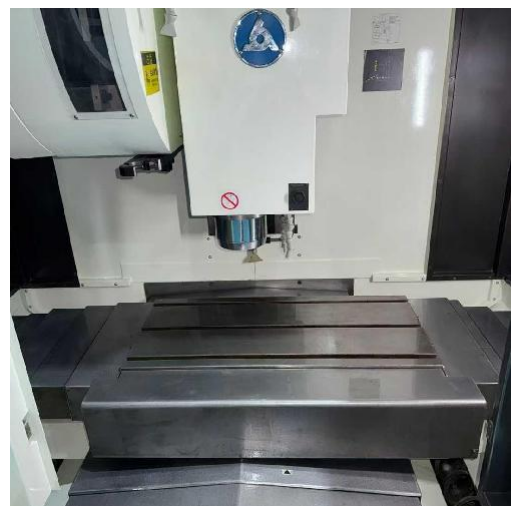



5 大螺旋轴 2 根 加工轴加工 3 根 丝杠 2 根。柱 20 T 和 螺 20 T 丝杆。采用 5 轴式，双端安装，从而可实现高精度加工。

最大工件：2750 mm

安装范围：20-20000 rpm

北村机械 Mycenter 3XiG/3XG

工作台	工作台尺寸	410×605 mm
	最大承重	500 kg
	X/Y/Z 轴	130/145/140 mm
主轴	主轴速度	250-20000
	最大承重	40-1500 mm
	主轴长度	1500 mm
	主轴直径	55-150 mm
	主轴长度	1500 mm
刀具	刀具长度	345-1200 mm
	刀具直径	1.5-12.5 mm
	刀具直径	1.5-12.5 mm
快速进给	快速进给速度	50,000 mm/min
	快速进给速度	50,000 mm/min
	快速进给速度	50,000 mm/min
电源和气压要求	电源电压	200V/300V/100V/50V/10V
	机床尺寸 (W×D×H)	2,100×2,100×2,100 mm
机床尺寸	机床重量	1,500 kg
	机床重量	1,500 kg
控制系统	操作系统	Automatic 3D (三菱 3A-7500)
	操作系统	Automatic 3D (三菱 3A-7500)