
Machine Name : Spark eroder

Brand : Mitsubishi

Machine Model : SG12M

Stock No. : 4812481


Ex-factory Date : 2023

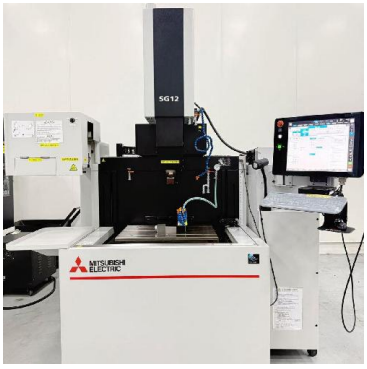

Main Technical Parameters:

Three-axis travel (X × Y × Z): 400 × 300 × 300 mm
Distance from worktable to electrode mounting surface: 200–500 / 300–600 mm
Max electrode weight: 50 kg
Max workpiece weight: 1000 kg
Working tank type: Automatic lifting / hinged door opening
Internal tank dimensions: 950 × 700 × 450 / 1050 × 700 × 450 mm
Dielectric fluid level adjustment range: 60–400 / 210–400 mm
Worktable size: 700 × 500 mm
Table height from floor: 900 mm
T-slot: 3 slots, 12–160 mm pitch
Max workpiece dimensions: 900 × 650 × 350 mm
Dielectric tank capacity: 360 / 550 L
Initial filling volume: 470 / 590 L
Filtration system: Paper filter ×2
Cooling system: Cooling unit
Machine weight: 3500 kg
Overall dimensions: 1725 × 2130 × 2420 / 1920 × 2100 × 2420 mm
Transport dimensions (excluding ATC): 1280 × 2420 / 1505 × 2420 mm
Equipped with C-axis
Tool magazine capacity: 9 tools


PamtonSchnell

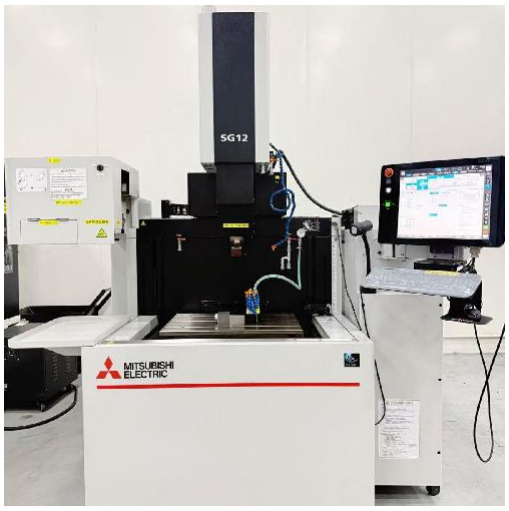








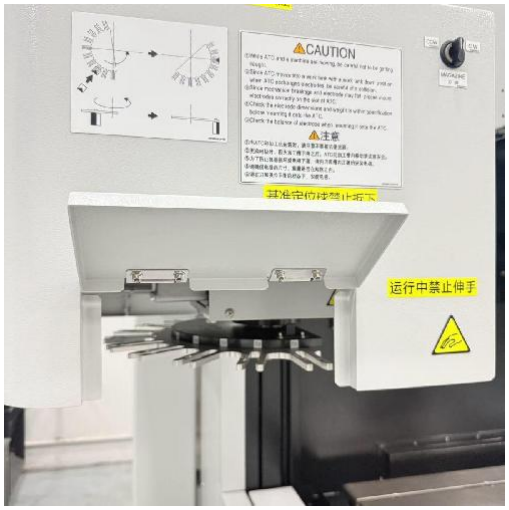




作业前后请扫码

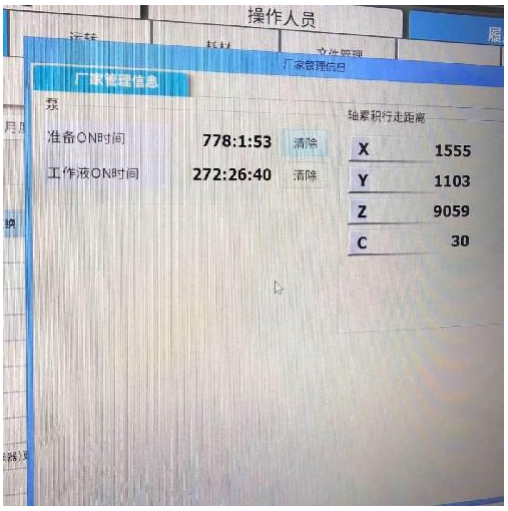
操作人员
准备ON时间
778:1:53
清除
工作液ON时间
272:26:40
清除
轴累积行走距离
X
1555
Y
1103
Z
9059
C
30