Machine Name : CNC turning lathe

Brand : DAINICHI

Machine Model : MG75x390

Stock No. : 468488


Ex-factory Date : 1995



Main Technical Parameters:

CNC System: FANUC 15-T
The maximum rotation diameter on the bed is 750mm
The maximum rotational diameter on the drag plate: 460mm
Distance between the two top centers: 3900mm
spindle through hole: 145mm
Main motor: 37kW
Spindle speed: 3-1800rpm



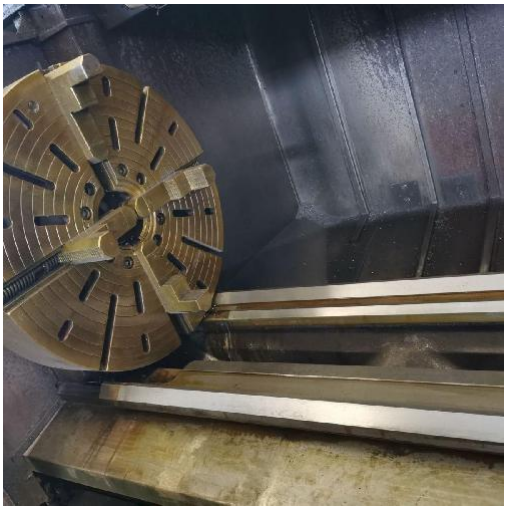

PamtonSchnell









様	Main Specifications	MC65 75×90-390
ベッドの振り	Swing over bed	650(25.5") 750(29.5")
刃上の振り	Swing over carriage	360(14.1")×60(16.1")300(11.8")H4+V8
両センター間距離	Distance between centers	1000,1500,2000,2500,3000,4000mm
最大加工長(H4天物台)	Max.turning length (H4)	900,1400,1900,2400,2900,3600mm (V8:−100m
(H4+V8天物台)	(H4 + V8)	650,1150,1650,2150,2650,3150mm
心押し台荷重	Support capa. center	1600kg(3520 lbs)
チャック荷重	Support capa. chuck	400kg(880 lbsチャック含む,include chuck
主軸先端の形状	Spindle nose	JIS A1-11
主軸受の径	Bearing dia.	φ140(5.5")
主軸通穴径	Dia.hole through spindle	85 mm(3.34")
テーパ穴径	Taper of main spindle	1/10 Metric Taper No.100
センター	Size of center	M.T.No.5
主軸回転速度	Spindle speeds	自動3段 無段(Auto.3groups infinite variable) 3~180
刃台の形状	Standard tool post	四角天物台H4(250□)
刃物の入れさ	Size of tool to be accommodated	25×25(1")mm
早送り速度	Rapid feed	6/9(~200),6(250~)m/min
自動移動距離	Traverse	380(14.96")/両方同距離と同じ Same as center dista
刃物台の幅	Width of cross slide	280mm(11")
送り速度	Cutting speeds	0.0001 ~500.0000mm/rev. 0.000001 ~9.99999
(インチモード)	(MDI mode)	1~2000mm/min. 0.04~79 in/min.
送り速度	Cutting speeds	15段(steps)0.025~3.15 mm/rev.
(EIAモード)	(EIA mode)	0.00098~0.124in/rev.
ベッド長さ	Bed Length	2750,3250,3750,4250,4850,5950mm
幅×高さ	Bed,width x height	480×735mm
Xサーボモータ	X axis servo motor	FANUC ACサーボ(servo) 1.0kW
Zサーボモータ	Z axis servo motor	FANUC ACサーボ(servo) 3.0kW
主駆動機	Main drive motor	A.C.スピンドル(Spindle motor) 11/7.5kW (Cont./50% ED)
心押軸の径	Dia.of tailstock spindle	φ100 mm(3.93")
センター穴径	Center of tailstock spindle	M.T.No.5
心押軸移動距離	Max travel of tailstock spindle	150mm(5.9")
心押軸推力	Thrust load of tailstock spindle	1000kg(2200 lbs)
重量	Machine Weight	5000(11000),5500(12100),6000(13200),6500(7000(15400),8300(17600)kg(lbs)
電源容量	Power source	