

Machine Name : TURN MILL CENTER

Brand : MAZAK

Machine Model : INTEGREX e-1060V/8

Stock No. : 813221

Ex-factory Date : 2011



Main Technical Parameters:

Three-axis travel: 1875 × 1060 × 1345 mm

B-axis swing range: -30° to +120°

C-axis: 360° continuous rotation

Machine structure: Gantry type + vertical turning composite

Milling head: B-axis swing milling head

Worktable: C-axis rotary worktable

Spindle taper: CAT50

Spindle speed: 25 to 10,000 rpm

Spindle power: 37 kW (30-minute rated)

Maximum torque: 730 Nm

Worktable size: Ø1000 mm, double pallet

Worktable load capacity: 3000 kg

Maximum workpiece size: Ø1250 × 1250 mm

Maximum load capacity: 10,000 kg

Positioning accuracy: ±0.005 mm

Repeatability: ±0.001 mm

CNC system: MAZATROL Smooth

Tool magazine capacity: 160 tools (tool change time: 6 to 8 seconds)

Configuration

Spindle center-through coolant

High-pressure coolant

External cooling unit

Double-sided chain-type + backflush drum-type chip conveyors

Automatic chip removal



Oil-water separator

Centralized lubrication

Functions: Conversational programming + G-code, 5-axis simultaneous machining, multi-channel synchronization, E-Tower data management

Standard configuration: MAZATROL Matrix/Matrix2 (15-inch color LCD/CRT)

Overall weight: 37,000 kg

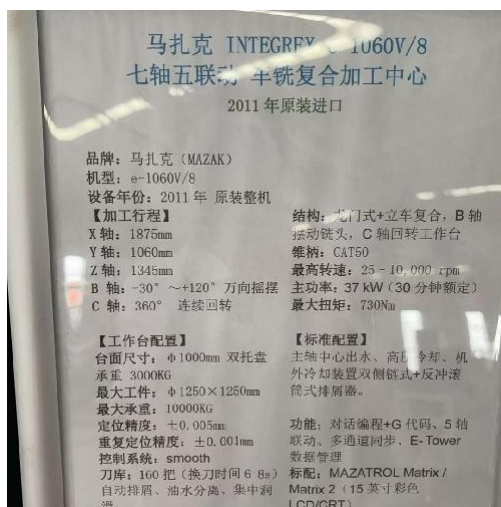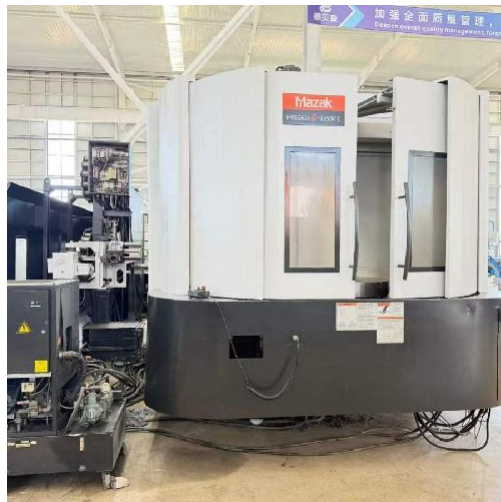

马扎克 INTEGREX C-1060V/8 七轴五联动 车铣复合加工中心 2011年原装进口

品牌：马扎克 (MAZAK)
机型：e-1060V/8
设备年份：2011年 原装进口

【加工行程】
X轴：1875mm
Y轴：1060mm
Z轴：1345mm
B轴：-30° ~ +120° 万向摇摆
C轴：360° 连续回转

【工作台配置】
台面尺寸：φ1000mm 双托盘
承重：3000KG
最大工件：φ1250×1250mm
最大承重：10000KG
定位精度：±0.005mm
重复定位精度：±0.001mm
控制系统：smooth
刀库：160把 (换刀时间 6.8s)
自动排屑、油水分离、集中润滑

结构：龙门式+立车复合，B轴
摆动铣头，C轴回转工作台
主轴：CAT50
最高转速：25-10,000 rpm
主功率：37 KW (30分钟额定)
最大扭矩：730Nm

【标准配置】
主轴中心出水、高压冷却、机
外冷却装置双侧链式+反冲液
筒式排屑器。
功能：对话编程+G代码、5轴
联动、多通道同步、E-Tower
数据管理
标配：MAZATROL Matrix /
Matrix 2 (15英寸彩色
LCD/CRT)