

Machine Name : Double spindle turning center

Brand : WIA

Machine Model : LM2500TTS

Stock No. : 80151

Ex-factory Date :



Main Technical Parameters:

Used Korea Wia LM2500TTS double spindle turning center

The parameters are as follows:

Model :LM2500TTS

The main shaft is 10 inches and the back shaft is 10 inches

12 station servo double knife tower


Rotary diameter :780mm

Processing length :920mm

Use power for 4000 hours long idle

The original import of the whole machine is nearly 3 million

Factory date :2011

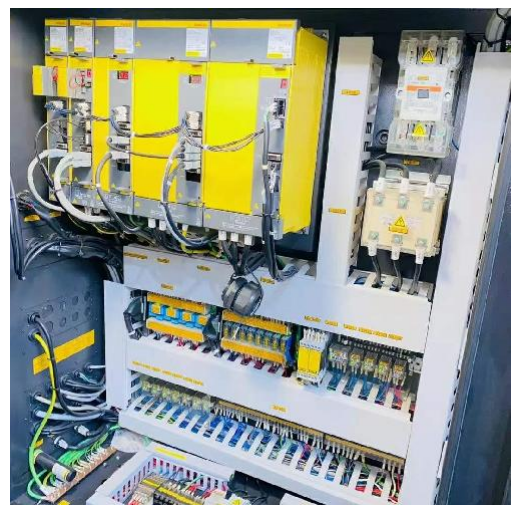



半轴轴衬硬度	HB	—	435/296	—	435/296
内齿圈硬度	HB	—	435/296	—	435/296
主轴轴衬形式	齿轴	—	—	Pin-1-Motor	—
	齿-轴式	—	Pin-1-Motor	—	Pin-1-Motor
半轴	—	—	—	AG-S	—
离合器	—	—	AG-S	—	AG-S
离合器额定力	dag	—	—	360° (5.007°)	—
X/20°齿	mm	—	—	275/380	—
Z/22°齿	mm	—	—	909/822	—
Y1°齿	mm	—	—	—	120
Z2°齿	mm	—	820	—	520
X/30°29°齿轴	mm/min	—	—	24/24	—
Z/2°2°齿轴	mm/min	—	—	24/24	—
Y快速进给轴	mm/min	—	—	—	12
Z快速进给轴	mm/min	—	24	—	24
轴衬形式	—	—	—	EO-258EOE	—
刀具直径	mm	—	—	2x37	—
刀具直径范围	mm	—	—	1235-158	—
刀具长度尺寸	mm	—	—	6385	—
刀具安装时间	min/step	—	—	9.7	—
VM行程	—	—	—	—	输入数据
额定出力/转速	kW	—	—	8.5/2.2	—
额定切削速度	/min	—	—	4,200	—
额定进给/轴	mm	10/100	—	49/1786	—
Collet尺寸	mm	—	—	125/1242	—
刀架形式	—	—	—	0M7/0E7	—
花键带圈直径	mm	M74	—	M74	—
液压管圈直径	mm	10/100	—	0/30	—
液压管圈压力	mm	131	—	131	—
液压行程	mm	600	—	600	—