Machine Name : CNC lathe

Brand : Doosan

Machine Model : PUMA215II

Stock No. : 483840

Ex-factory Date : 2013



Main Technical Parameters:

Maximum rotating diameter on the bed: 510mm

Maximum rotating diameter on the saddle: 310mm

Recommended machining diameter: 210mm

Maximum machining diameter: 270mm

Maximum machining length: 522mm

Bar diameter: 65mm

Chuck size: 210mm

Spindle through hole diameter: 77mm

Spindle motor power: 11/15kw

Maximum spindle speed: 4500rpm

Maximum spindle torque: 127.3Nm

X-axis travel: 160mm (20+140)

Z-axis travel: 530mm

X-axis fast feed rate: 16m/min

Z-axis fast feed rate: 20m/min

X-axis maximum cutting feed rate: 500mm/rev

Z-axis maximum cutting feed rate: 500mm/rev

Inclination angle: 30deg

Span of bed guideway (Z axis) : 380mm

Span of saddle guideway (X axis) : 255mm

Tool magazine: 12

Cylindrical tool size: 25*25mm

Boring rod diameter: 40mm

Curved clutch diameter: 210mm

Tailstock center diameter: 65mm

Tailstock center travel: 80mm

Height from ground to spindle center: 995mm

Machine dimension: 2263*1649*1690mm

Machine weight: 3500kg





PamtonSchnell












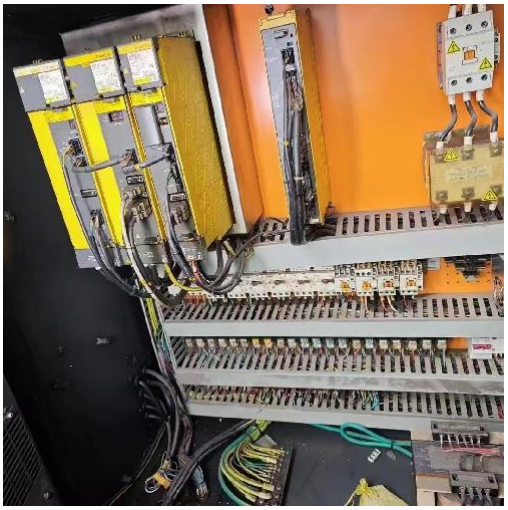


DOOSAN
产品名称：数控车床
型 号：
序列号：
电 源：AC200/220V, 3Φ. PE, 50/60Hz
额定容量 ：
最大负荷量 ：
满负荷电流 ：
截断电流 ：
电气图纸版本 ：
生产制造 ：
中国制造
机床总开关提供过电流保护。
斗山机床（烟台）有限公司
Doosan Infracore Machine Tools Yantai CO., LTD
山东省烟台市经济技术开发区斗山一路1号