

Machine Name : Horizontal machining center

Brand : OKUMA

Machine Model : MB- 1000H

Stock No. : 64283

Ex-factory Date : To be supplemented



Main Technical Parameters:

three-axis travel :1400*1250*1250mm

Worktable :1000*1000mm


spindle :6000 resolutions

tools magazine :BT50

spindle: 40

CNC System :okuma PSP-P300M



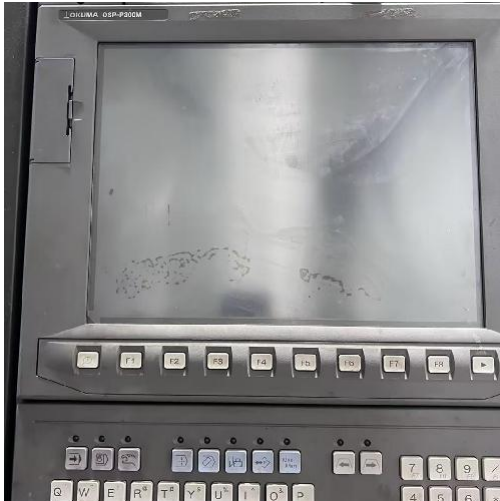

主要参数			
项目	单位	参考 APC	
最大加工能力	mm	1,400 × 1,250 × 1,250	
行程	X 轴 (立柱左右)	mm	1,400
	Y 轴 (主轴箱上下)	mm	1,250
	Z 轴 (工作台前后)	mm	1,250
	主轴中心距工作台 (托盘) 上表面	mm	-20-1,230/ *4 -50-1,230
	工作台 (托盘) 中心距主轴箱	mm	100-1,350
工作台	工作台 (托盘) 尺寸	mm	1,030 × 1,000
	最大负载能力	kg	2,000/5 1,850
	分度数 [角度]		标准: 200 (1° 增量, 直接指令) 选装: 360,000 (0.001° 增量, 直接指令)
主轴	主轴转速范围 [标准 (广域)]	min ⁻¹	50-6,000 (50-12,000)
	主轴传动机构		无限变速
	主轴锥孔 (前轴承处) [标准 (广域)]	mm	NT No.50 Φ100(Φ100)
进给速度	快速进给速度 (XYZ 轴)	mm/min	50,000
	切削进给速度 (XYZ 轴)	mm/min	1-50,000
ATC	刀柄		标准: MAS BT50 选装: CAT No.50, HSK-A100
	螺钉		规格: MAS 2 号 选装: MAS 1 号, CAT, 特殊 CAT
	刀库容量	刀具	标准: 40
	最大刀具直径	mm	选装: 50, *1 100, 150, 200, 240, 320, 400 有键型刀具: Φ140, *2 Φ135