

Machine Name : CNC Slant Lathed lathe

Brand : Tongtai

Machine Model : TCS2000Lu

Stock No. : 89082

Ex-factory Date : 2018



Main Technical Parameters:

CNC CNC System: FANUC TF

Rotary diameter: Ø520mm

machining length: 600mm

Main motor power: 11/15kw, servo

Configuration


12-position servo tool turret

8-inch hollow hydraulic chuck

Chain right chip removal

With a hydraulic tailstock



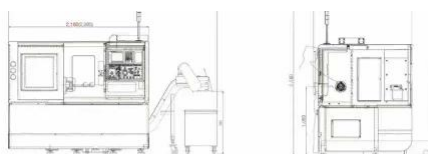

规格表

项目	规格	等级	TCS-1500u	TCS-2000u	TCS-2000Lu
加工能力	最大孔径	mm		ø520	
	滑台上最大孔径	mm		ø520	
	最大切削径	mm		ø300(ø200)	
	最大切削长度	mm		400	800
主轴	主轴锥端	mm	A2-5		A2-6
	主轴转速	rpm	4,800		4,500(3,000)
	主轴行程	inch	8"		8"
	主轴孔径	mm	ø56		ø62
	螺孔螺距能力	mm	ø44		ø51
	主轴前法兰内径	mm	ø80		ø100
	主轴前法兰角度	deg			
转塔	刀具容量	pc		12(8)	
	外径刀柄	mm		25X25	
	内径刀柄	mm		ø32(ø40)	
动力转塔 (选配)	刀具容量	pc			
	马达功率	kW		-	
	外径刀柄	mm		-	
	内径刀柄	mm		-	
行程	X/Z轴行程	mm		170/400(-)	
	X/Z轴快速进给	m/min		30/30(-)	
	X/Z轴切削进给	m/min		0.001-500	
强力底座	底座/心轴行程	mm	275/100		500/100
	中心位置检测			MT3	
	驱动方式			manual	
油压单元	油压容量	L		30	
	油压压力	bar		10	