Machine Name : Vertical machining center

Brand : KITAMURA

Machine Model : Mycenter- 3XH

Stock No. : 44444488563

Ex-factory Date : 2016



Main Technical Parameters:

travel of X*Y*Z axis: 760*455*460mm

WorkWorktable size: 410*900nm

Maximum load: 500kg

Spindle speed: 40- 15,000 RPM

spindle taper: NST.NO.40

spindle motor power: 15kw

spindle torque: 95.5Nm

Rapid feed rate: 50,000 mm/min

Chip feed rate: 0-36000mm/min

tools magazine :30

Distance from workWorktable to spindle nose is 110*570mm

machine tool weight: 5,740 kg


Appearance Footage: 2235*2370*2882.4mm

PamtonSchnell







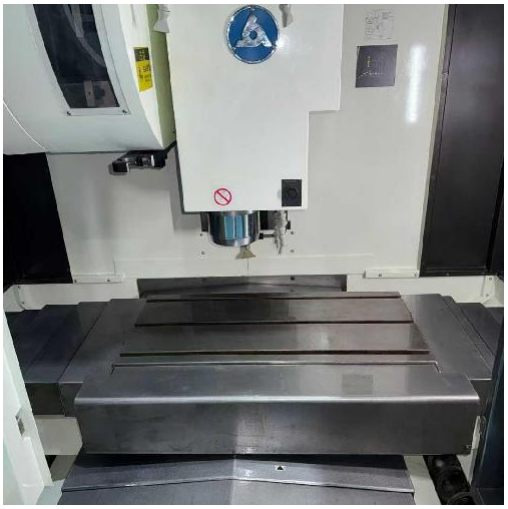





PamtonSchnell





最大扭矩：272N.m

转速范围：20-20000rpm。

北村机械 Mycenter3XiG/3XG

工作台	工作台尺寸	410×800 mm
	最大承重量	500kg
	X/Y/Z行程	760×455×460mm
主轴	主轴锥度	NT/BT/DIN No.40
	最大转速	40-15,000 min-1
	主轴电机	15KW
	主轴扭矩	95.5N.m
	主轴方式	直联主轴
刀库	刀具数量	30把(可选)
	刀柄	MAS BT.NO.40
	刀具交换时间（T-T/C-C）	1.6sec/3.2sec
快速进给	切削进给速度(X,Y,Z轴)	50,000 mm/min
	快速进给速度(X,Y,Z)	36,000 mm/min
	切削进给速度	36,000 mm/min
电源和气源要求	电源供给	交流200伏±10% 30KVA
机床尺寸	机床尺寸(W×D×H)	2,250×2,170×2862.4mm
	机床重量	5,840kg
控制系统	控制系统	Accutek M(三菱M-750V)